



Datasheet

Length measurement system LMSCA32


www.wachendorff-automation.com/lmsca32-wdgp

Wachendorff Automation

... systems and encoders

- Complete systems
- Industrial rugged encoders to suit your application
- Standard range and customer versions
- Maximum permissible loads
- 48-hour express production
- Made in Germany
- Worldwide distributor network

Robust length measurement system LMSCA32

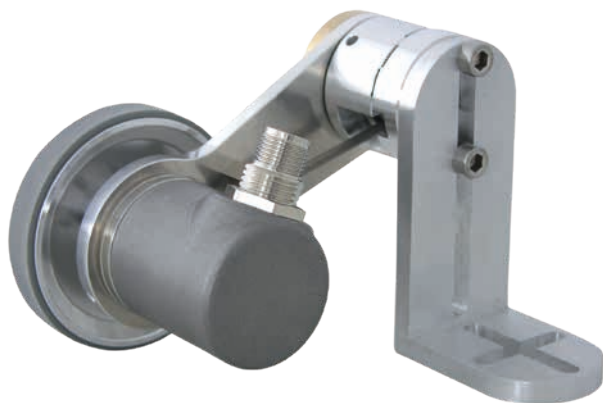

- Ultra compact system with new spring-loaded arm, WDGP 36A encoder and 150 mm or 200 mm measuring wheel
- Up to 0.01 mm/impulse for measurement results
- Suitable for many surfaces
- Absorbent mounting
- Contact pressure – easily adaptable by intelligent central adjustment
- Easy to dismantle through pre-assembled angle bracket

www.wachendorff-automation.com/lmsca32-wdgp

Resolution WDGP 36A with

Measuring systems LMSxxxKH, LMSxxxKG, LMSxxxNG:

200 ppr:	1 pulse/mm = 1.0 mm/pulse
2000 ppr:	10 pulses/mm = 0.1 mm/pulse
5000 ppr:	25 pulses/mm = 0.04 mm/pulse
16000 ppr:	80 pulses/mm = 0.0125 mm/pulse

Measuring system LMSxxxGR:

150 ppr:	1 pulse/mm = 1.0 mm/pulse
1500 ppr:	10 pulses/mm = 0.1 mm/pulse
3750 ppr:	25 pulses/mm = 0.04 mm/pulse
15000 ppr:	100 pulses/mm = 0.01 mm/pulse

Mechanical Data of the system modules

Housing encoder

Flange	synchro flange
Flange material	aluminium
Housing cap	stainless steel

Shaft(s)

Shaft material	stainless steel
Starting torque	approx. 0.2 Ncm at ambient temperature

Shaft	Ø 6 mm shaft with flat
Shaft length	L: 11.5 mm
Max. permissible shaft loading radial	80 N
Max. permissible shaft loading axial	50 N

Bearings

Max. operating speed	12000 rpm
----------------------	-----------

Spring loaded arm

Adjustable prestressing force	0 N up to 20 N in steps of 5 N
Length of spring lever axis	74.5 mm
Material	aluminum
Contact pressure	adjustable, 3°-step equates 5 N pressure increase

Machinery Directive: basic data safety integrity level

MTTF _a	1200 a
Mission time (T _M)	20 a
Nominal service life (L _{10h})	1.7 x 10 ¹⁰ revs. at 20 % rated shaft load and 12000 rpm
Diagnostic coverage (DC)	0 %

Electrical Data

Power supply/Current consumption	4.75 VDC up to 32 VDC: typ. 80 mA
Output circuit	TTL, HTL
Pulse frequency	HTL up to 16384 ppr: max. 600 kHz TTL up to 16384 ppr: max. 1 MHz
Channels	ABN and inverted signals
Load	max. 40 mA / channel
Circuit protection	inverse-polarity and short-circuit protection

Accuracy

Phase offset	90° ± max. 8.5 % of a period duration
pulse-/pause-ratio	50 % ± max. 7 %

General Data

Weight	approx. 270 g
Connection	Connector radial
Protection rating (EN 60529)	IP67, shaft sealed to IP65

Operating temperature

LMSxxxKH:	-10 °C up to +70 °C
LMSxxxKG:	-10 °C up to +70 °C
LMSxxxNG:	-10 °C up to +50 °C
LMSxxxGR:	-40 °C up to +85 °C

Range of application measuring wheel U = 200 mm

 LMSxxxKH: (even)	Plastic, painted surfaces, paper, paste-board, wood, metal, textiles.
 LMSxxxKG: (fluted)	Plastic, painted surfaces, paper, paste-board, wood, metal, textiles.
 LMSxxxNG: (pimpled)	Textiles.

Range of application measuring wheel U = 150 mm

 LMSxxxGR: (even)	Wood, metal, conveyor belts, paper, textiles.
--	---

More information

General technical data and safety incremental encoders
www.wachendorff-automation.com/gtd

Options
www.wachendorff-automation.com/acc

Customs tariff number: 90318020
Country of origin: Germany

Order No.:



Table with 2 columns (mm/pulses, Pulses) and 24 rows of product models. The table shows application ranges for various models including LMSCA321000024KH, LMSCA321000005KH, LMSCA321000024KG, LMSCA321000005KG, LMSCA3201000024NG, LMSCA320100005NG, LMSCA320100024KH, LMSCA320100005KH, LMSCA320100024KG, LMSCA320100005KG, LMSCA320400024KH, LMSCA320400005KH, LMSCA320040024KG, LMSCA320040005KG, LMSCA320012524KH, LMSCA320012505KH, LMSCA320012524KG, and LMSCA320012505KG.

* Range of application measuring wheel U = 200 mm
1 LMSxxxKH Plastic, painted surfaces, paper, pasteboard, wood, metal, textiles.
2 LMSxxxKG Plastic, painted surfaces, paper, pasteboard, wood, metal, textiles.
3 LMSxxxNG Textiles.



Table with 2 columns (mm/pulses, Pulses) and 8 rows of product models. The table shows application ranges for models including LMSCA321000024GR, LMSCA321000005GR, LMSCA320100024GR, LMSCA320040024GR, LMSCA320040005GR, LMSCA320010024GR, and LMSCA320010005GR.

Range of LMSxxxGR application measuring wheel U = 150 mm
Wood, metal, conveyor belts, paper, textiles.

The length measuring system is also available without a mounting bracket. Order number: LMSCA22xxxxxxxxxx

For further assistance please feel free to contact us.
We would be happy to help you to find the suitable resolution, measurement wheel, cable length
or other accessory to optimize your application.

WACHENDORFF
The Encoder Experts

Authorized Distributor

For further information please contact our local distributor.
Here you find a list of our distributors worldwide.

<https://www.wachendorff-automation.com/contact-sales-en/>

WACHENDORFF

Wachendorff Automation GmbH & Co. KG
Industriestrasse 7 • D-65366 Geisenheim

Tel.: +49 (0) 67 22 / 99 65 - 25
Fax: +49 (0) 67 22 / 99 65 - 70
E-Mail: wdg@wachendorff.de
www.wachendorff-automation.com

